

09/600769

UNITED STATES PATENT APPLICATION TRANSMITTAL FORM

BOX PCT
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231
Attention: DO/EO/US

Docket No.: 360.7169USU

Sir:

Transmitted herewith for filing is the patent application of

Applicant (s): Nigel Hugh Sanders; Anthony Gregory Smith and
David Michael Thomas

For: METHOD AND APPARATUS OF COATING
ARTICLES

International Application No.: PCT/GB99/00158

International Filing Date: 18 January 1999

ENTERING OF U.S. NATIONAL STAGE UNDER 35 U.S.C. §371

Transmitted herewith for filing are the following documents submitted under 37 C.F.R. §1.495(b) for the purpose of entering the national stage in the United States of America as an elected office. Enclosed are:

_____ Specification and Claims with Declaration;

XXXXX Specification and Claims *without* Declaration;

XXXXX _____ 1 _____ sheet of drawing;

XXXXX Preliminary Amendment;

_____ An Assignment of the invention to: _____, including
\$40.00 recordation fee;

_____ The certified copy of a priority application;

XXXXX Information Disclosure Statement with copies of patent(s) (Form -
PTO-1449);

_____ Verified Statement of Small Entity (Independent Inventor);

_____ Verified Statement of Small Entity (Small Business Concern);

534 Rec'd PCT/PT 21 JUL 2000

XXXXX Priority of application Serial No. 9801132.3 filed on 21 January 1998 in United Kingdom; and PCT International Application No. PCT/GB99/00158 filed on 18 January 1999 is claimed under 35 U.S.C. §119 and 35 U.S.C. §365;

XXXXX Cover page of published PCT Publication No. WO 99/37163 ;

XXXXX Copy of International Preliminary Examination dated 10 May 2000;

_____ Copy of PCT Demand Under Article 31; and

XXXXX Copy of International Search Report dated 25 May 1999.

_____ Copy of Written Opinion.

_____ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) are transmitted herewith.

The Filing Fee is calculated below.

CLAIMS AS FILED				
(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee \$670/\$760// \$840 / \$970/\$96
Total Claims	17 - 20 =	0	x \$18.00	\$0
Independent Claims	4 - 3 =	1	x \$78.00	\$78.00
Multiple Dependent Claim Fee		x \$260.00 = \$0.00		
TOTAL FILING FEE				\$918.00
1/2 FILING FEE FOR SMALL ENTITY				\$N/A

XXXXX Firm's check in the amount of \$ 918.00 to cover the filing fee;

XXXXX The Commissioner is hereby authorized to charge any additional fees under 37 C.F.R. 1.16 and 1.17 which may be required with this communication or during the entire pendency of the application, or credit any overpayment, to **Deposit Account No. 01-0467**. A duplicate copy of this Form is enclosed.


XXXXX Postcard.

534 Rec'd PCT/PTC 21 JUL 2000

Address all future communications to: **Paul D. Greeley, Esq.**
Ohlandt, Greeley, Ruggiero & Perle, L.L.P.
One Landmark Square, 9th Floor
Stamford, Connecticut 06901-2682
U.S.A.

July 21, 2000

Date of Signature




Paul D. Greeley/Esq.
Attorney for Applicant(s)
Ohlandt, Greeley, Ruggiero & Perle, L.L.P.
Registration No. 31,019
Telephone: (203) 327-4500
Telefax: (203) 327-6401

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Certificate No. **EL561018658US**, service under 37 CFR §1.10 and is addressed to: Box PCT, Assistant Commissioner for Patents, Washington, D.C. 20231, Attention: DO/EO/US on July 21, 2000.

Joanne A. Romaniello

(Typed name of person mailing paper)



(Signature of person mailing paper)

534 Rec'd PCT/PTC 21 JUL 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Sanders et al.
Serial No.: Not Yet Assigned
For: Method and Apparatus of Coating Articles
Filed: Not Yet Assigned
Examiner: Not Yet Assigned
Art Unit: Not Yet Assigned Attorney Docket No.

Box Patent Application July 20, 2000
Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Applicants respectfully submit the following amendments and remarks.

IN THE CLAIMS

Please amend the claims as follows:

1. (Amended) A method of applying a coating to articles, comprising the steps of:
 - (i) providing a curtain [(30)] of solidifiable liquid coating material [(16)];
 - (ii) effecting relevant movement between articles [(12)] to be coated and the curtain [(30)] so as to coat the articles with the solidifiable liquid coating material [(14)];and

- (iii) subjecting the solidifiable liquid coating material to the action of at least one stream of gas under pressure whereby to modify the flow characteristics of the curtain.

Claim 3, line 1, delete “or 2”.

Claim 5, line 1, delete “or 4”.

Claim 6, line 1, delete “any preceding claim” and insert therefor --- claim 1 ---.

Claim 8, line 1, delete “any preceding claim” and insert therefor --- claim 1 ---.

Claim 9, line 1, delete “any preceding claim” and insert therefor --- claim 1 ---.

Claim 10, line 1, delete “any preceding claim” and insert therefor --- claim 1 ---.

Claim 11, line 1, delete “any preceding claim” and insert therefor --- claim 1 ---.

Claim 12, line 1, delete “any preceding claim” and insert therefor --- claim 1 ---.

13. (Amended) An apparatus for applying a coating to articles, comprising:
- (i) supply means [(14)] arranged to provide a curtain [(30)] of solidifiable liquid coating material [(16)];
- (ii) means [(10)] for effecting relative movement between articles [(12)] are coated and the supply means [(14)] whereby in use the articles [(12)] are coated with solidifiable liquid coating material [(16)] in the curtain [(30)]; and

- (iii) means [(20, 22; 40, 46, 48)] arranged to subject the solidifiable liquid coating material [(16)] to the action of at least one stream of gas under pressure whereby to modify the flow characteristics of the curtain [(30)].

14. (Amended) A method of controlling a curtain of a solidifiable liquid composition comprising the steps of:

- (i) providing a curtain [(30)] of solidifiable liquid material [(16)]; and
- (ii) before, during and/or after step (i), subjecting the solidifiable liquid material [(16)] to the action of at least one stream of gas under pressure whereby to modify the characteristics of the curtain [(30)].

Claim 16, line 1, delete "or 15".

17. (Amended) An apparatus for controlling curtain of a solidifiable liquid composition comprising:

- (i) supply means [(14)] arranged to provide a curtain [30] of solidifiable liquid coating material [(16)]; and
- (ii) means [(20, 22; 40, 46, 48)] arranged to subject the solidifiable liquid coating material [(16)] to the action of at least one stream of gas under pressure whereby to modify the characteristics of the curtain [(30)].


REMARKS

The claims have been amended to remove all multiple dependencies therefrom.

The claims have also been amended to remove all drawing numeral designations.

In view of the foregoing amendments and remarks applicants respectfully request reconsideration and allowance of all the claims presently in the application.

Respectfully submitted,



Paul D. Greeley
Ohlandt, Greeley, Ruggiero & Perle, LLP
Attorneys for Applicant(s)
Reg. No. 31,019
(203)327-4500

PTO/PCT Rec'd 21 JUL 2000

METHOD AND APPARATUS OF COATING ARTICLES

This invention relates, in a first of its aspects, to a method of and an apparatus for applying a coating to articles, eg an edible coating to food articles. The invention is particularly, but not exclusively, concerned with the application of edible coating materials which exhibit non-Newtonian behaviour, for example chocolate, to articles of confectionery and the like.

The present invention also relates, in a second of its aspects, to an improved method of forming a curtain of material eg edible material which can be used to coat articles eg articles of food or which can be used in other ways in the formation of articles, eg articles of food.

It is well known to enrobe articles of food such as chocolate assortments, confectionery bars, biscuits, cookies and cakes with a layer of chocolate. This coating process is known as chocolate enrobing and is traditionally effected by moving the articles on a mesh-type conveyor belt through a curtain of liquid chocolate whose consistency is carefully controlled. However, it is difficult to achieve the desired coating because of the high viscosity. It is therefore common practice to subject the articles to a greater than needed coating, then controlling the amount of chocolate remaining on the articles by blowing by air from fans and using vibration to remove the excess.

Also, the temperature of chocolate cannot be increased so as to reduce its viscosity as it will lose its temper, causing problems of incorrect fat crystallisation which can deleteriously affect the appearance and/or eating quality of the chocolate. Thus, it is common for enrobing chocolate to have a higher fat content than standard chocolate used for making chocolate bars in order to reduce its viscosity. This has adverse cost

implications.

In order to establish the curtain of chocolate, it is known to allow chocolate to pass under the action of gravity through an outlet slot in the bottom of a trough having inclined side walls leading to the slot. This type of apparatus has a relatively low throughput because of the high viscosity of the chocolate and the relatively low rate at which it can flow through the outlet slot. The common solution to this problem is to use a wider slot, which results in a thicker curtain which then requires removal of more excess from the articles. Because of the physical characteristics of the chocolate which passes through the slot, the curtain can "neck" to a substantial extent. In other words, the width of the chocolate curtain becomes substantially less than the length of the slot from which it issues.

This means that the effective cover of the curtain over the width of the conveyor belt used to carry the articles through the curtain is reduced.

Another known form of apparatus for producing a chocolate curtain utilises a roller along which liquid chocolate is distributed and carried to a blade which causes the layer of chocolate on the roller to become detached and thereby establish the curtain. This can provide higher coating rates with a better control of curtain thickness, but difficulties still arise in coating.

With both of the above types of known apparatus, the amount of chocolate in the descending curtain is greatly in excess of that required to coat the articles. The excess drains through the mesh-type conveyor belt and needs to be recycled and its condition carefully controlled.

It is an object of a first aspect of the present invention to obviate or mitigate at least some of the above disadvantages.

3

In accordance with said first aspect of the present invention, there is provided a method of applying a coating to articles, comprising the steps of:

- (i) providing a curtain of solidifiable liquid coating material;
- (ii) effecting relevant movement between articles to be coated and the curtain so as to coat the articles with the solidifiable liquid coating material; and
- (iii) subjecting the solidifiable liquid coating material to the action of at least one stream of gas under pressure whereby to modify the flow characteristics of the curtain.

Also in accordance with said first aspect of the present invention, there is provided apparatus for applying a coating to articles, comprising:

- (i) supply means arranged to provide a curtain of solidifiable liquid coating material;
- (ii) means for effecting relative movement between articles to be coated and the supply means whereby in use the articles are coated with the solidifiable liquid coating material in the curtain; and
- (iii) means arranged to subject the solidifiable liquid coating material to the action of at least one stream of gas under pressure whereby to modify the flow characteristics of the curtain.

Preferably, the articles are articles of food and the coating material is an edible coating material.

In the case where the present invention is used in a coating apparatus of the type in which the coating material is caused to flow along a surface of the supply means (eg a trough) towards an outlet slot through which the coating material flows under the action of gravity to form the curtain, it is

4

preferred for said at least one stream of gas to be introduced between the coating material and the surface of the supply means. In this way, a layer of gas can be introduced between the surface and the coating material as it flows towards the outlet slot. Preferably, in the case of a trough where the coating material flows over opposed surfaces towards the outlet slot, a layer of gas is introduced between the coating material and each of the opposed surfaces. This can not only substantially reduce the resistance to flow of the coating material over the surfaces, but can also reduce the viscosity of the coating material if it is of a type whose viscosity is reduced when subjected to shear.

It is particularly preferred to cause said at least one stream of gas under pressure to become attached to the surface of the supply means so as to assist in establishing the layer of the gas between the surface and the coating material. This may be achieved by positioning one or more gas-admission slots in such a way as to direct the gas against the surface of the supply means. The spacing between the outlet slot and the or each gas-admission slot depends upon the nature of the coating material and the geometry of the supply means, which may comprise a trough having V-shaped walls defining opposed surfaces which converge towards the outlet slot. If the or each gas-admission slot is disposed too close to the outlet slot, then the flow of gas through the outlet slot may actually restrict the flow of coating material therethrough. On the other hand, if the or each gas-admission slot is disposed too far away from the outlet slot, the coating material flowing over the surface may become re-attached to the surface of the supply means before it reaches the outlet slot.

In the case where the above-mentioned trough is employed, it is within the scope of the present invention to provide said at least one stream of gas under pressure at one or both convergent opposed surfaces of the

trough leading to the outlet slot.

Said at least one stream of gas under pressure may be applied to the coating material after the curtain has been established in order to change the direction of the curtain and/or a physical property of the coating material forming the curtain. It is also within the scope of the present invention to subject the coating material to the action of at least one stream of gas both before and after the curtain has been established.

A curved surface may be provided adjacent to part of the curtain, and means may be provided for causing a stream of gas to flow over the curved surface by virtue of the Coanda effect and to use this to induce a change in the direction of travel of the curtain. In this way, it is possible to control the direction of flow of the curtain from any angle from vertical to substantially horizontal. This effect can be used whether or not the coating material is subjected to the action of at least one stream of gas under pressure before the curtain is established. In this regard, the curtain may be established by flow of the coating material through an outlet slot or by distributing the coating material over the length of a roller and causing it to be transported to a blade which removes the coating material from the roller and thereby establishes the curtain.

It is within the scope of the present invention to use one or more curtains of coating material to coat the articles and to control the direction of movement of these curtains simultaneously or independently in such a way as to ensure maximum coverage. For example, one of the curtains may be controlled so that its direction of movement is an acute angle (e.g. 45°) relative to the direction of relative movement between the articles and the curtain, whilst the other curtain can be controlled so that its direction of movement is an obtuse angle (e.g. 135°) with respect to said

direction of relative movement. In this way, coating of upstream and downstream ends of the articles may be facilitated.

In certain embodiments, the control of the pressure of the stream of gas can be employed to control the speed of descent of the curtain. Thus, by controlling the rate of descent of the curtain and the rate of relative movement between the articles and the curtain, a variety of different effects can be achieved. For example, if the rate of descent of the curtain is matched with the rate of relative movement, then a smooth coating can be achieved. If the rate of curtain descent is greater than the rate of relative movement, then a surface patterning effect can be achieved by the resultant folding of the applied curtain onto the articles. On the other hand, if the rate of descent is less than the rate of relative movement, a degree of stretching of the coating material as it becomes attached to the articles may be achievable with resultant thinning of the layer of coating material applied to the articles. The effects achieved will also depend upon the physical properties of the coating material.

The present invention is applicable to the use of non-Newtonian liquids such as chocolate or Newtonian liquids such as caramel as coating materials.

In the case of chocolate (or other non-Newtonian liquid, a liquid whose viscosity reduces when subjected to shear), a very high degree of control is achievable because the stream of gas under pressure can be caused to contact the surface of the chocolate in such a way as to reduce its viscosity by application of a shear force. This has the particular advantage that the chocolate flows much more easily but then rapidly thickens once the shear force has been removed. The application of the stream of gas under pressure to the chocolate before the curtain has been established can

enable the previously mentioned necking problem to be mitigated and can also enable a much higher throughput to be achieved for a given size of coating apparatus. Because of the viscosity reduction achieved, it is possible to coat with a much higher viscosity chocolate than has heretofore been considered possible. For example, it is possible to coat with relatively viscous tempered chocolate, rather than having to coat with a chocolate composition having an increased fat content and subsequently lowered tempered viscosity in order to establish and maintain the desired liquid curtain. The need to effect air blowing and/or vibration on the coated articles may be obviated or mitigated. The present invention permits a curtain of even thickness to be achieved and may also enable a thinner curtain to be produced than has heretofore been possible.

Conveniently, the gas is air. The temperature of the gas may be substantially the same as that of the solidifiable liquid coating material. This is particularly advantageous in the case where the material is liquid chocolate.

It will be appreciated that the present invention in its first aspect involves the control of a curtain of solidifiable liquid coating material for the purpose of coating or enrobing articles. However, it will be appreciated that similar techniques can be employed for controlling a curtain of a solidifiable liquid material for use in the production of other articles. For instance, the curtain can be controlled for the purpose of enabling a layer of the material to be deposited into a mould or moulds (e.g. to produce shells of solidified material which can then be used to contain filling material), or onto a conveyor for solidification as a layer thereon which can be subsequently cut to size or otherwise shaped. The fact that the curtain can be very accurately controlled in terms of the thickness of the curtain and/or its angle/speed of descent means that a close control over

the thickness and/or texture of the deposit can be obtained which can be difficult to achieve with standard confectionery shell technology.

Thus, in its second aspect, the present invention resides in a method of controlling a curtain of a solidifiable liquid composition comprising the steps of:

- (i) providing a curtain of solidifiable liquid material; and
- (ii) before, during and/or after step (i), subjecting the solidifiable liquid material to the action of at least one stream of gas under pressure whereby to modify the characteristics of the curtain.

Also in accordance with said second aspect of the present invention, there is provided apparatus for controlling curtain of a solidifiable liquid composition comprising:

- (i) supply means arranged to provide a curtain of solidifiable liquid coating material; and
- (ii) means arranged to subject the solidifiable liquid coating material to the action of at least one stream of gas under pressure whereby to modify the characteristics of the curtain.

The method and apparatus may further include provision for (a) depositing the modified curtain of solidifiable liquid composition to form a layer in a mould or on a surface, and (b) solidifying the deposited composition.

The solidifiable liquid composition is preferably an edible composition.

Embodiments of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Fig. 1 is a schematic view of one embodiment of an apparatus according

to the present invention, where, for ease of demonstration, only one longitudinal trough surface is shown with an air supply, Fig. 2 is a side view of a trough forming part of the apparatus of Fig. 1, and Fig. 3 is a schematic view of a second embodiment of apparatus according to the present invention.

Referring now to Fig. 1 of the drawings, the apparatus illustrated therein is for enrobing confectionery bars with a layer of chocolate. The apparatus comprises a mesh-type conveyer belt 10 carrying confectionery bars 12 to be coated horizontally from right to left as viewed in Fig. 1. A liquid chocolate supply trough 14 is spaced above the conveyor 10 and comprises V-shaped walls 14a and 14b leading to a downwardly opening outlet slot 14c. The trough 14 contains liquid chocolate 16 which is to be used for coating the confectionery bars 12 to form coated confectionery bars 18.

The trough 14 contains an additional wall 14d which is inclined at an acute angle relative to the wall 14b and which terminates about 10 mm above the outlet slot 14c which, in this embodiment, has a width of about 2 mm. The walls 14b and 14d together define a downwardly convergent plenum chamber 20 terminating in an air-admission slot 22. The slot 22 has a width of 0.2 mm and extends for the whole length of the outlet slot 14c, and is disposed about 10 mm above the outlet slot 14c of the trough 14. The plenum chamber 20 is connected with a source of pressurized air. Although not shown in the drawings, the wall 14a is likewise provided with an additional wall defining an identical air-admission slot like slot 22.

Disposed below the conveyor 10 is a tank 24 which also contains liquid chocolate 16. A pump (not shown) serves to pump the liquid chocolate

10

16 from the tank 24 to the trough 14 via pipework 28.

In use, the conveyor belt 10 is operated to move the confectionery bars 12 in a path which carries them under the outlet slot 14c of the trough 14. The chocolate 16 in the trough 14 is typically maintained at a temperature in the range of 28 to 31 °C and travels through the slot 14c under the action of gravity so as to produce a curtain 30 of liquid chocolate through which the confectionery bars 12 pass. The curtain 30 extends perpendicularly across the conveyor belt 10 which carries a plurality of rows of the confectionery bars 12, although only one row of bars 12 is illustrated in the drawings. The resultant coated bars 18 are carried by the conveyor 10 and excess chocolate drips through the holes in the screen conveyor 10 and back into the tank 24 for recirculation.

During this time, air under pressure is supplied to the plenum chamber 20 so that it is ejected through the air-admission slot 22 so as to become attached to that portion of the wall 14b which lies between the slots 22 and 14c. The result of this is that a layer of air is inserted between the chocolate 16 passing towards the outlet slot 14c and the wall 14b immediately upstream of the slot 14c. The same occurs at the wall 14a. This substantially reduces the friction between the chocolate and the walls. Additionally, the pressurised air exerts a shear force on the adjacent surface of the chocolate, thus reducing the viscosity of the chocolate in the region of the outlet slot 14c. This improves the flowability of the chocolate so that it substantially increases the flow rate through the slot and also mitigates the necking problem whereby the width of the curtain 30, i.e. the dimension perpendicular to the plane of the drawing, can be maintained substantially the same as the length of the slot 14c.

In one experiment, it was found that no less than a 70% increase in the

flow rate through the slot 14c could be achieved using an air supply pressure of 2 psig, as compared to the situation where no air is supplied through the gas-admission slot 22. Although, substantially improved results could be achieved with air pressures as low as 0.5 psig and up to about 3 psig. It will be understood that the shear effect is produced because the air is moving at a greater rate than the chocolate with which it is in contact.

The above-described method enables improved control to be achieved, which can lead to the following advantages:-

- (a) lighter chocolate coatings,
- (b) more precise coating with less excess deposit,
- (c) less variation in deposit across the conveyor belt,
- (d) faster enrobing speeds,
- (e) lower proportion of chocolate to be recycled,
- (f) less build-up of chocolate on the edges of the bars, leading to better edge definition,
- (g) selective production of textured or plain coatings by adjustment of air pressure and conveyor belt speed.
- (h) avoidance of the need to use enrobing chocolate (which has a high fat content to decrease its viscosity when liquid), thereby enabling the use of regular or even lower fat chocolate.

Referring now to Fig. 3 of the drawings, there is illustrated an apparatus also in accordance with the present invention for altering the direction of descent of chocolate curtain 30. The chocolate curtain 30 may be one which has been produced as described hereinabove with reference to Figs. 1 and 2. Alternatively, it may be a conventionally produced chocolate curtain which has been formed without introduction of an air-stream into trough 14. As a further alternative, it may be a conventionally produced

12

curtain formed by distributing a layer of liquid chocolate onto the surface of a roller and then detaching the layer from the roller by means of a blade.

In the apparatus of Fig. 3, there is provided a cylindrical plenum chamber 40 which is horizontally disposed to one side of the curtain 30 above the conveyer 10 and which extends for greater than the full width of the curtain 30. The plenum chamber 40 may conveniently be mounted on the trough 14 so that it can be positioned close to the outlet 14c. The plenum chamber 40 has a pressurised air inlet 42 and a row of upwardly directed air outlets 44 extending over the length of the plenum chamber 40. An angled cap 46 is secured to the outer periphery of the plenum chamber 40 along a longitudinal side edge thereof which is remote from the curtain 30. The opposite longitudinal side edge of the strip 46 is spaced from the peripheral surface of the plenum chamber 40 so as to define an air-exit slot 48. The slot 48 has a width of typically about 0.2 mm. The plenum chamber 40 can be moved laterally horizontally relative to the curtain 30 so as to enable the gap between it and the curtain 30 to be adjusted. Likewise, the plenum chamber 40 can be turned about its longitudinal axis to enable the position of the slot 48 relative to the curtain 30 to be adjusted.

In use, air is supplied through the inlet 42 into the plenum chamber 40 from whence it issues through the outlets 44 and thence through the outlet slot 48. It is thus caused to adhere to the curved peripheral surface of the plenum chamber 40 by virtue of the Coanda effect whereby it follows the external periphery of the plenum chamber 40 for a considerable distance.

The effect of this curved flow of air is to draw the curtain 30 towards the plenum chamber 40, thus altering the angle of descent of the curtain 30. The angle of descent can be varied by varying the pressure of the air

13

and/or by varying the positioning of the slot 48 relative to the curtain 30.

In Fig. 3, the plenum chamber 40 is shown on the downstream side of the curtain 30 relative to the conveying direction of the confectionery bars 12 through the curtain 30. Thus, the effect is to incline the direction of descent of the curtain 30 at an acute angle relative to the direction of movement of the confectionery bars 12. This can enable improved effects to be achieved. It is possible to "lay" the curtain 30 of chocolate gently onto the surfaces of the bars 12 by appropriately matching the rate of descent of the curtain 30 to the speed and movement of the bars 12. It is also considered that, because of the angling of the curtain 30, it will be possible to improve coating of the leading ends of the confectionery bars 12.

However, it will be appreciated that it is possible to locate the plenum chamber 40 on the opposite side of the curtain 30, ie on the upstream side thereof so as to cause the direction of descent of the curtain 30 to extend at an obtuse angle relative to the conveying direction of the confectionery bars 12. In this way, it is considered that an improved coating of the trailing ends of the confectionery bars 12 may be achievable. Also, further control over the effects produced can be achieved by altering the conveyor rate relative to the rate of descent of the curtain 30.

If desired, the confectionery bars 12 may be taken through more than one curtain 30 with the curtains being disposed of the same or different angles depending upon the effects required.

If desired, the confectionery bars may be passed through the curtain twice, the first time for the purpose of effecting a main coating operation and a second time for the purpose of ensuring that the coated bar is of the

specified weight.

The curtain of chocolate (or another solidifiable liquid material) produced as described with reference to either or both of the illustrated embodiments may, instead of being used to enrobe articles such as confectionery bars, be used to form a layer of controlled properties (eg thickness) into moulds as an alternative to conventional depositing technology, followed by cooling to solidify the layer. Such a technique can be used to form shells for subsequent filling with a filling material. Alternatively, the curtain may be laid onto a conveyor to form a controlled layer thereon which is subsequently solidified and cut to size to the desired shape.

CLAIMS

1. A method of applying a coating to articles, comprising the steps of:
 - (i) providing a curtain (30) of solidifiable liquid coating material (16);
 - (ii) effecting relevant movement between articles (12) to be coated and the curtain (30) so as to coat the articles with the solidifiable liquid coating material (14); and
 - (iii) subjecting the solidifiable liquid coating material to the action of at least one stream of gas under pressure whereby to modify the flow characteristics of the curtain.
2. A method as claimed in Claim 1, wherein the articles are articles of food and the coating material is an edible coating material.
3. A method as claimed in Claim 1 or 2, further including the steps of causing the coating material to flow along a surface of a supply means towards an outlet slot through which the coating material flows under the action of gravity to form the curtain, and introducing said at least one stream of gas between the coating material and the surface of the supply means.
4. A method as claimed in claim 3, wherein the supply means includes a trough having opposed surfaces leading towards the slot, and a layer of gas is introduced between the coating material and each of the opposed surfaces.
5. A method as claimed in claim 3 or 4, wherein said at least one stream of gas under pressure is caused to become attached to the surface

16

of the supply means so as to assist in establishing the layer of the gas between the surface and the coating material

6. A method as claimed in any preceding claim, wherein at least one stream of gas under pressure is applied to the coating material after the curtain has been established in order to change the direction of the curtain and/or a physical property of the coating material forming the curtain

7. A method as claimed in claim 6, wherein said at least one stream of gas is caused to flow over a curved surface adjacent to part of the curtain by virtue of the Coanda effect whereby a change in the direction of travel of the curtain is induced.

8. A method as claimed in any preceding claim, wherein more than one curtain of coating material is established to coat the articles, and the curtains are controlled simultaneously and/or independently.

9. A method as claimed in any preceding claim, wherein the pressure of the stream of gas is controlled to control the speed of descent of the curtain and the rate of relative movement between the articles and the curtain is controlled.

10. A method as claimed in any preceding claim, wherein the gas is air.

11. A method as claimed in any preceding claim, wherein the gas is at a temperature which is substantially the same as that of the solidifiable liquid coating material.

12. A method as claimed in any preceding claim, wherein the liquid

coating material is liquid chocolate.

13. An apparatus for applying a coating to articles, comprising:

- (i) supply means (14) arranged to provide a curtain (30) of solidifiable liquid coating material (16);
- (ii) means (10) for effecting relative movement between articles (12) to be coated and the supply means (14) whereby in use the articles (12) are coated with the solidifiable liquid coating material (16) in the curtain (30); and
- (iii) means (20, 22; 40, 46, 48) arranged to subject the solidifiable liquid coating material (16) to the action of at least one stream of gas under pressure whereby to modify the flow characteristics of the curtain (30).

14. A method of controlling a curtain of a solidifiable liquid composition comprising the steps of:

- (i) providing a curtain (30) of solidifiable liquid material (16); and
- (ii) before, during and/or after step (i), subjecting the solidifiable liquid material (16) to the action of at least one stream of gas under pressure whereby to modify the characteristics of the curtain (30).

15. A method as claimed in claim 14, comprising the steps of depositing the modified curtain of solidifiable liquid composition to form a layer in a mould or on a surface, and solidifying the deposited composition.

16. A method as claimed in claim 14 or 15, wherein the solidifiable liquid composition is an edible composition.

17. An apparatus for controlling curtain of a solidifiable liquid

18

composition comprising:

- (i) supply means (14) arranged to provide a curtain (30) of solidifiable liquid coating material (16); and
- (ii) means (20, 22; 40, 46, 48) arranged to subject the solidifiable liquid coating material (16) to the action of at least one stream of gas under pressure whereby to modify the characteristics of the curtain (30).



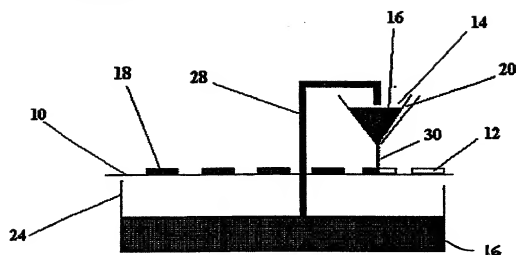


FIG. 2

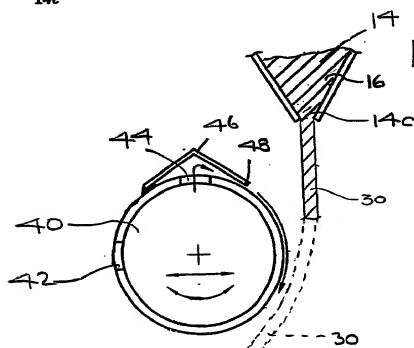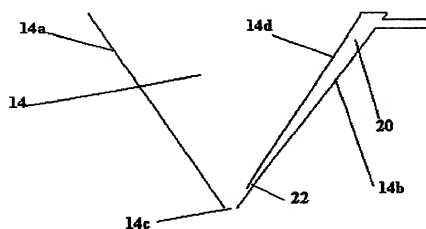

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Docket No. 360.7169USU

As below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our respective names.

We believe we are the original, and first joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled: METHOD AND APPARATUS OF COATING ARTICLES.

[INSERT TITLE]

the specification of which

(check one) ☐ is attached hereto.

XXX was filed on July 21, 2000 as Application Serial No. 09/600,769
and was amended on _____ (if applicable).

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to us to be material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate(s) listed below and have also identified below any foreign application(s) for patent or inventor's certificate(s) having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

9801132.3
(Number)

Great Britain
(Country)

21 Jan. 1998
(Day/Mon/Year Filed)

X Yes No

PCT/GB99/00158
(Number)

Great Britain
(Country)

18 Jan. 1999
(Day/Mon/Year Filed)

 X Yes No

(Number)

(Country)

(Day/Mon/Year Filed)

Yes No

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status - patent, pend., abandon.)

(Application Serial No.)

(Filing Date)

(Status - patent, pend., abandon.)

POWER OF ATTORNEY: As named inventors, we hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

NAMES	REGISTRATION NUMBERS
Paul D. Greeley	31,019
Charles N.J. Ruggiero	28,468
Harry F. Smith	32,493

SEND CORRESPONDENCE TO:	DIRECT TELEPHONE CALLS TO:
Paul D. Greeley Ohlandt, Greeley, Ruggiero & Perle, L.L.P. One Landmark Square, 9th Floor Stamford, Connecticut 06901-2682	Paul D. Greeley, Esq. Telephone: (203) 327-4500 Telefax: (203) 327-6401

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	SANDERS	Nigel	Hugh
RESIDENCE & CITIZENSHIP	CITY	STATE OR COUNTRY	CITIZENSHIP
	Toronto	Canada	British
POST OFFICE ADDRESS	P.O. ADDRESS	CITY & STATE	ZIP CODE
	277 Gladstone Avenue	Toronto	M6J 3L9

Inventor's signature

Date

, 2000

[TYPE INVENTOR'S NAME]

200

FULL NAME OF INVENTOR	LAST NAME <u>SMITH</u>	FIRST NAME <u>Anthony</u>	MIDDLE NAME <u>Gregory</u>
RESIDENCE & CITIZENSHIP	CITY <u>Bath</u> <u>GBX</u>	STATE OR COUNTRY <u>United Kingdom</u>	CITIZENSHIP <u>British</u>
POST OFFICE ADDRESS	P.O. ADDRESS 6 Napier Road, Upper Weston	CITY & STATE <u>Bath</u>	ZIP CODE <u>BA1 4LN</u>

Inventor's signature  Smith Date 19/10, 2000
[TYPE INVENTOR'S NAME]

300

FULL NAME OF INVENTOR	LAST NAME <u>THOMAS</u>	FIRST NAME <u>David</u>	MIDDLE NAME <u>Michael</u>
RESIDENCE & CITIZENSHIP	CITY <u>Bristol</u> <u>GBX</u>	STATE OR COUNTRY <u>United Kingdom</u>	CITIZENSHIP <u>British</u>
POST OFFICE ADDRESS	P.O. ADDRESS 16 Chandos Road Keynsham,	CITY & STATE <u>Bristol</u>	ZIP CODE <u>BS31 2DB</u>

Inventor's signature  Thomas Date 19/10, 2000
[TYPE INVENTOR'S NAME]

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Docket No. 360,7169USU

As below named inventors, we hereby declare that:

Our residences, post office addresses and citizenships are as stated below next to our respective names.

We believe we are the original, and first joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS OF COATING ARTICLES

the specification of which

(check one) _____ is attached hereto.

XXX was filed on July 21, 2000 as Application Serial No. 09/600,769
and was amended on _____ (if applicable).

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to us to be material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56.

We hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate(s) listed below and have also identified below any foreign application(s) for patent or inventor's certificate(s) having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

9801132.3
(Number)

Great Britain
(Country)

21 Jan. 1998
(Day/Mon/Year Filed)

☒ Yes ☐ No

PCT/GB99/00158
(Number)

Great Britain
(Country)

18 Jan. 1999
(Day/Mon/Year Filed)

☒ Yes ☐ No

(Number)

(Country)

(Day/Mon/Year Filed)

☐ Yes ☐ No

We hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status - patent, pend., abandon.)

(Application Serial No.)

(Filing Date)

(Status - patent, pend., abandon.)

POWER OF ATTORNEY: As named inventors, we hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

NAMES	REGISTRATION NUMBERS
Paul D. Greeley	<u>31,019</u>
Charles N.J. Ruggiero	<u>28,468</u>
Harry F. Smith	<u>32,493</u>

SEND CORRESPONDENCE TO:	DIRECT TELEPHONE CALLS TO:
<u>Paul D. Greeley</u> <u>Ohlandt, Greeley, Ruggiero & Perle, LLP</u> <u>One Landmark Square, 9th Floor</u> <u>Stamford, Connecticut 06901-2682</u>	Paul D. Greeley, Esq. Telephone: (203) 327-4500 Telefax: (203) 327-6401

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	<u>SANDERS</u>	<u>Nigel</u>	<u>Hugh</u>
RESIDENCE & CITIZENSHIP	CITY	STATE OR COUNTRY	CITIZENSHIP
	<u>Toronto</u> <i>CHX</i>	<u>Canada</u>	<u>British</u>
POST OFFICE ADDRESS	P.O. ADDRESS	CITY & STATE	ZIP CODE
	<u>277 Gladstone Avenue</u>	<u>Toronto</u>	<u>M6J 3L9</u>

Inventor's signature

N. Sanders

Date

14th Sept.

2000

NIGEL HUGH SANDERS

FULL NAME OF INVENTOR	LAST NAME SMITH	FIRST NAME Anthony	MIDDLE NAME Gregory
RESIDENCE & CITIZENSHIP	CITY Bath	STATE OR COUNTRY United Kingdom	CITIZENSHIP British
POST OFFICE ADDRESS	P.O. ADDRESS 6 Napier Road, Upper Weston	CITY & STATE Bath	ZIP CODE BA1 4LN

Inventor's signature _____ Date _____, 2000
 Anthony Gregory Smith

FULL NAME OF INVENTOR	LAST NAME THOMAS	FIRST NAME David	MIDDLE NAME Michael
RESIDENCE & CITIZENSHIP	CITY Bristol	STATE OR COUNTRY United Kingdom	CITIZENSHIP British
POST OFFICE ADDRESS	P.O. ADDRESS 16 Chandos Road, Keynsham	CITY & STATE Bristol	ZIP CODE BS31 2DB

Inventor's signature _____ Date _____, 2000
 David Michael Thomas